

**Renz Punch 500**  
with fixed shafts

**Renz Punch 500 E**  
with eccentric shafts

Electrical desk top punches  
with exchangeable punching dies



and horizontal paper feeding  
for low to medium series

**RENZ**<sup>®</sup>

BINDING AND LAMINATING SYSTEMS



RENZ

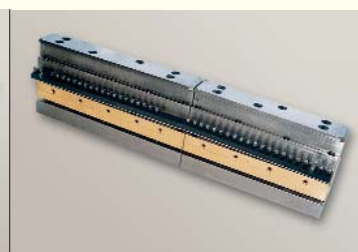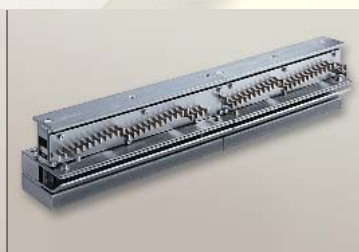

**Changing of ...**

Fast and easy changing of punching dies ...

**...punching dies**

... in just a few minutes

**Standard punching die**

2-part die with thumb cut for punching blocks as well as calendars, therefore, a second die has not to be acquired. All punching dies for ring wire binding and plastic comb binding are in QSA-execution (quick size adjustment = quick cancellation of punch pins). Therefore, it is not necessary to remove the die for changing the format.

**AP-die**

AP-dies offer a higher punching capacity, punch pins can be reground. Installation of grooving dies and AP-punching dies is only possible in type P 500 E with eccentric shafts. AP-dies are also available in QSA-execution.

Renz Punch 500 E with eccentric shafts and adjustment scale for the installation of grooving dies and AP-dies.



Logistic table for improving the work flow with work space left and right.




**SPECIFICATIONS – AT A GLANCE**

	RENZ Punch 500	RENZ Punch 500 E
<b>Length, width, height</b>	745 x 500 x 480 mm 29 x 20 x 19"	745 x 500 x 480 mm 29 x 20 x 19"
<b>Working width</b>	500 mm [20"]	500 mm [20"]
<b>Punching thickness of standard dies</b> <b>Punching thickness of AP dies</b>	approx. 4,0 mm*	approx. 4,0 mm*
<b>Practical punching speed</b>	approx. 400-500 strokes /h**	approx. 400-500 strokes /h**
<b>Eccentric shafts</b>	no	yes
<b>Connection</b>	230/400 V, 50 Hz/3 ph./0,75 kW on request 3 x 240 V, 60 Hz	230/400 V, 50 Hz/3 ph./0,75 kW on request 3 x 240 V, 60 Hz
<b>Weight</b>	150 kg [330 lbs]	152 kg [334 lbs]

\* depending on the die pattern  
\*\* depending on the operator

**EXCHANGEABLE PUNCHING DIES FOR ALL LOOSE-LEAF BINDING SYSTEMS.**

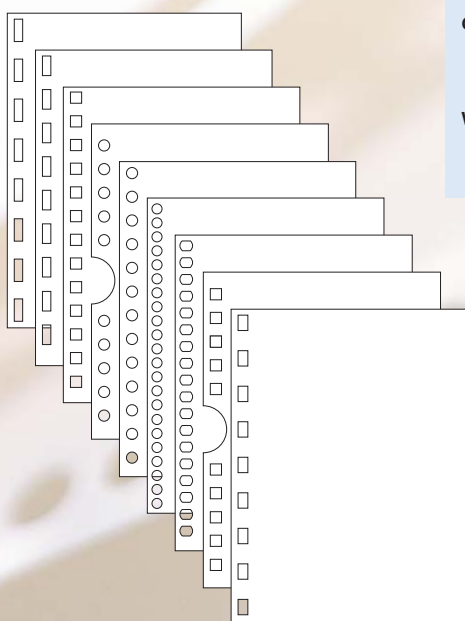

**SOLID MACHINE** for punching, perforating and grooving of paper up to a working width of 500 mm [20"]. Comfortable working by foot pedal and horizontal paper feeding.

**UNIVERSAL USE** by exchangeable dies. The machine is prepared for the installation of standard dies and high-speed punching dies of the AP-series.